

# **Oval & Triangle Shape** Fabric Shielding Gaskets

**Shielding Effectiveness**  
80 - 115dB

**Frequency Range**  
20Mhz - 1GHz

**Low Compression**  
See page 18 for typical performance

**Dura-Layer Construction**  
Resilient base with high-performance fabric

**Recommended Compression**  
30-50% of gasket height

## **OVAL SHAPE** with pressure sensitive adhesive mounting.





Available in standard 24" and 48" lengths or cut to length as desired.

Conductive tape and products without tape can also be supplied. Contact factory for ordering information.

Please consult factory for sizes not shown.

See technical data sheet for typical cross section and length tolerances.

| Part             | H (in) | (mm) | W (in) | (mm)  |
|------------------|--------|------|--------|-------|
| <b>SG140200E</b> | 0.140  | 3.56 | 0.200  | 5.08  |
| <b>SG160790E</b> | 0.160  | 4.06 | 0.790  | 20.07 |

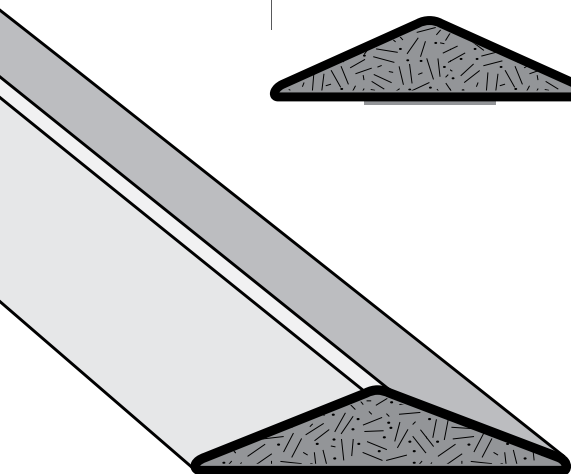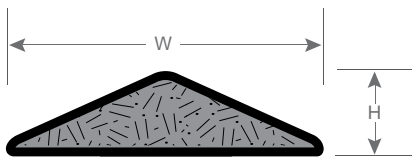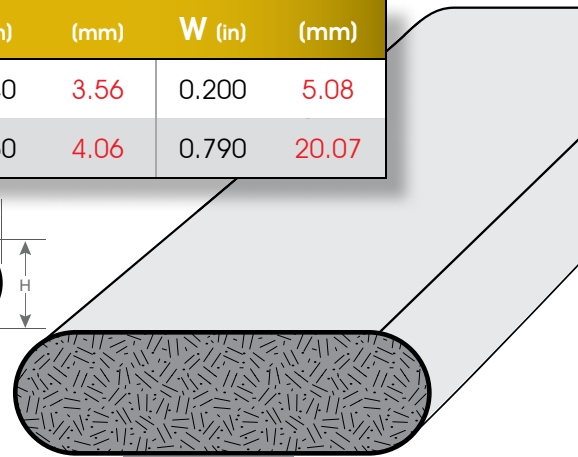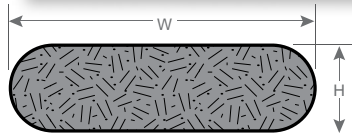

## **TRIANGLE SHAPE** with pressure sensitive adhesive mounting.

Available in standard 24" and 48" lengths or cut to length as desired.

Conductive tape and products without tape can also be supplied. Contact factory for ordering information.

Please consult factory for sizes not shown.

See technical data sheet for typical cross section and length tolerances.

| Part              | H (in) | (mm) | W (in) | (mm)  |
|-------------------|--------|------|--------|-------|
| <b>SG098500TR</b> | 0.098  | 2.49 | 0.500  | 12.70 |
| <b>SG140390TR</b> | 0.140  | 3.56 | 0.390  | 9.91  |